

KASON CDX-III Magnetic Particle Flaw Detector



19 YEARS

Development Base of Advanced Testing Machine Of China

Feature

Compact size and light weight.
One-piece molding, comfortable to hold.

Technical Parameters

Single phase AC power		AC220V 50Hz
Operating temperature		-10~+40℃
Working temperature rise		<18℃
Relative humidity		<80% no condensation
Sensitivity		A1 type standard test piece 15/50 notch clearly displayed
AC magnetizing power supply		X
DC magnetizing power supply		X
AC working current		AC2.2A
DC operating current		X
Charging time		X
Battery life		X
duty cycle		50%
Magnetization pole pitch		0~230mm
Lifting power	A C	≥4.5kg(44N)
	D C	≥18.1kg (177N)
weight	electromagnetic yoke	2.3kg
	Magnetizing power supply	X

Note: “X” means that this function is not available, “●” means that this function is available.

Standard configuration

Magnetic Yoke Flaw Detector	1 set
power cord	1 piece
Instrument box	1 piece

19 YEARS

Professional focused on testing equipment

KASON is established in 2003,owns more than 8000 square meters factory.has a professional sales teams, modern enter prise technology center,scientific and technological research and development team.

Machines passed the European CE authentication,American FDA certificate and and ISO 9001.

Products sold to USA, Canada, Australia, Europe, Africa etc,more than 130 countries and supply OEM service for many customers


PROFESSIONAL TEAM

KASON has a professional sales teams, modern enter prise technology center,scientific and technological research and development team.





METALLGURGICAL PRODUCT SHOW

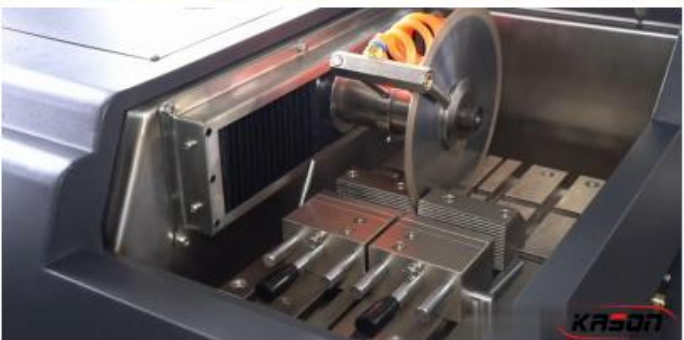

KASON reserves the right to modify the technical and stetics characteristics included in this document, without previous notice

DuandianIndustrial Park ,
Jingshi Road, Jinan City,
Shandong Province, China.

Tel. +86 531 58595086
Fax. +86 531 86113769
Email: admin@jnkason.com